



SVX 500 SNOW 2T

Semi-synthetic oil for 2-stroke snowmobile engines

USES

High-quality semi-synthetic oil specifically developed for use in 2-stroke snowmobile engines equipped with carburettor or fuel-injection systems.

Compatible with separated and pre-mix lubrication.

Mixing ratio from 2% to 4%, depending on the manufacturer's recommendations.

Specifications:

API TC
JASO FD
ISO-L-EGD


MAIN PHYSICAL DATA

	Methods	Units	Values
Density at 20°C	ASTM D4052	kg/m ³	868
Kinematic viscosity at 40°C	ASTM D445	mm ² /s	80
Kinematic viscosity at 100°C	ASTM D445	mm ² /s	11
Viscosity index	ASTM D2270		125
Pour point	ASTM D97	°C	-36
Cleveland Open Cup Flash Point	ASTM D92	°C	113
Colour			Blue

The data given in this table represents typical production values and should not be taken as specifications.

PROPERTIES & ADVANTAGES

- ▶ Low pour point, meaning it can be used in separated lubrication systems at low temperatures.
- ▶ Prevents clogged exhaust pipes.
- ▶ Excellent protection of the engine's internal parts against rust.
- ▶ Very good protection of cylinders, pistons and piston rings against seizing.
- ▶ Dyed blue for easy detection in fuel.
- ▶ Prevents the fouling of spark plugs and the gumming of piston rings.

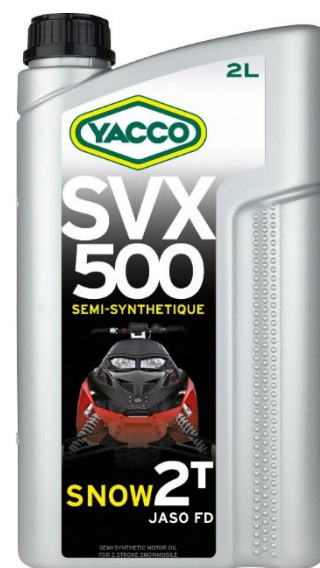

 facebook.com/yaccosas

 twitter.com/yaccosas

 youtube.com

