



# FORK FLUID 10W

FORK FLUID

## USES

The 10W viscosity grade is used by most OEMs for conventional forks.

This 10W fork oil is part of our YACCO FORK FLUID product range.

For softer damping, use FORK FLUID 2.5W, 5W or 7.5W. For firmer damping, use FORK FLUID 15W or FORK FLUID 20W.


## MAIN PHYSICAL DATA

	Methods	Units	10W
Density at 20°C	ASTM D4052	kg/m <sup>3</sup>	861
Kinematic viscosity at 40°C	ASTM D445	mm <sup>2</sup> /s	35
Kinematic viscosity at 100°C	ASTM D445	mm <sup>2</sup> /s	7.5
Viscosity index	ASTM D2270		190
Pour point	ASTM D97	°C	-51
Cleveland Open Cup Flash Point	ASTM D92	°C	224

*The data given in this table represents typical production values and should not be taken as specifications.*

## PROPERTIES & ADVANTAGES

- ▶ High shear resistance means stable performance of the suspension.
- ▶ Low pour point means good performance at very low temperatures.
- ▶ Excellent anti-foam, anti-wear, anti-corrosive and anti-friction properties.
- ▶ Excellent damping under all service conditions.
- ▶ Protects O-rings.
- ▶ Compatible with fork oil seals.

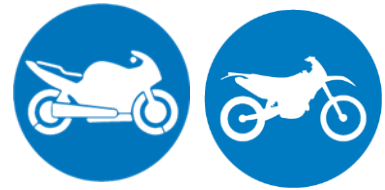

 [facebook.com/yaccosas](https://facebook.com/yaccosas)

 [twitter.com/yaccosas](https://twitter.com/yaccosas)

 [youtube.com](https://youtube.com)

